

Model No: SLS-160F32PR02-08
Product Line:

Rev 1
Last Update: 2017-01-05 14:20:43



Product Description

The SLS line combines high quality performance with an affordable design. This 6.5 Inch 8Ohm member of the SLS family features a rigid steel basket, and a ferrite magnet motor with aluminium shorting ring for improved distortion performance.

NOTE THIS DRIVER IS NOT APPROVED AND/OR IS NOT IN MASS PRODUCTION YET.
AS SUCH IT MAY BE SUBJECT TO CHANGE.
SPEC IS ONLY FOR INFORMATION.
PLEASE CHECK STATUS WITH THE ENGINEER




Mechanical Drawing



Specifications

DC Resistance	Revc	Ohms	5.7	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	115.88
Minimum Impedance	Zmin	Ohms	6.23	7.5%	Moving Mass	Mms	g	15.84
Voice Coil Inductance	Le	mH	0.28		Suspension Compliance	Cms	um/N	1215.68
Resonant Frequency	Fs	Hz	36.27	15%	Effective Cone diameter	D	cm	13.5
Mechanical Q Factor	Qms		2.26		Effective Piston Area	Sd	cm ²	143.14
Electrical Q Factor	Qes		0.31		Effective Volume	Vas	L	34.98
Total Q Factor	Qts		0.28		Motor Force Factor	BL	Tm	8.11
Ratio Fs/Qts	F	Fs/Qts	131.89		Motor Efficiency Factor	β	(T*M ²)/Ohms	11.53
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	89.96	+/- 1.0db	Voice coil former Material	VCfm	ASV	
Half Space Sensitivity @1W/1M	db@1W/1M	dB	88.88	+/- 1.0db	Voice coil inner diameter	VCd	mm	32.41
Gap Height	Gh	mm	6		Rated Noise Power	P	W	25
Maximum Linear Excursion	Xmax	mm	4.65		Test Spectrum Bandwidth	20-3000HZ		
Ferrofluid Type	FF				Transducer Size	Inch	6.5	
Transducer Mass	Kg	1.41						

Frequency and Impedance Response

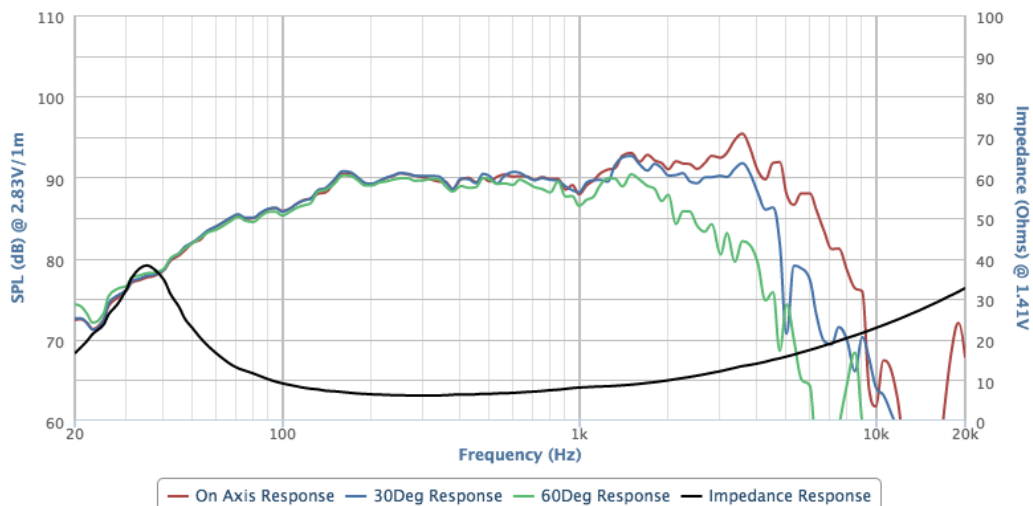

Highcharts.com